



SCALE

LAUDER LINEA 3D
INTERIOR



LAUDESCHER



SCALE

LAUDER LINEA 3D
INTERIOR


A graphic effect that plays with volume, rhythm and light

The new LINEA 3D range is an architectural panelling solution made up of openwork solid wood slats for the interior covering of walls and suspended ceilings.

Created with Woodlabo's designer-joiners, it offers a «haute couture» finish, thanks to three-dimensional high-precision woodwork that uses volume, rhythm and light to achieve a unique graphic appearance.

SCALE

LAUDER LINEA 3D
INTERIOR

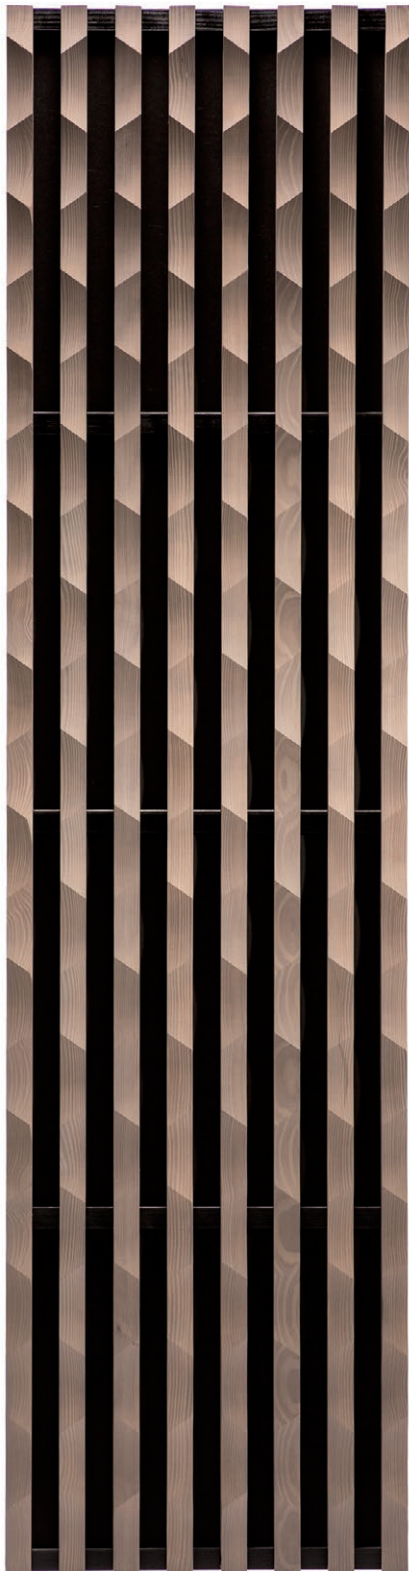

Solid wood with environmental certifications (PEFC/FSC)

All the slats are carefully selected to ensure the quality of the finished products (dry wood 10 to 12%, 1st choice). They are PEFC/FSC certified, guaranteeing that raw timber material come from sustainably managed forests. Laudescher panels result in low waste levels and are recyclable.



Improved hygiene and ventilation

Laudescher panels procure excellent circulation of air for improved ventilation and hygiene. The slatted panels are subject to an environmental and health declaration form.

High acoustic performance

Sound-insulated faced lining improves the acoustic performance of the panels (absorption and diffusion).

Optimum reaction to fire

Euroclass B-s1,d0
according to EN 13501-1

Good resistance to moisture

For installations with high humidity levels, category 3 timber species should be used. Risk categories according to NF EN 335-2 and NF B 50-100.

A wide range of colours

One main species is offered: pine. A wide range of Wax Color finishes allows the wood to be tinted and enhanced it, without being altered with it.

A customised response to the most ambitious projects

Its level of expertise allows Laudescher to provide unique technical and aesthetic responses by adapting the panel size, spacing, width and depth of the slats, their shape and the timber species.

ABOUT LAUDESCHER

- Designer and manufacturer of solid wood slatted panels, for interior cladding, walls, ceilings (LINEA), or external envelope (PAREA);
- Over 50 years of experience, 3 generations, 45 employees;
- R&D, design and manufacturing brought together on a 7,400 m² industrial site in Normandy;
- Timber supplied exclusively from sustainably managed forests;
- Approximately 500 major projects every year in France and abroad;
- Certified company:
 - ISO 50001 (energy efficiency)
 - ISO 14001 (environmentally-friendly approach)
 - ISO 9001 (quality commitment)
 - CE marking

CONTACT



Rue Marcel Laudescher
Z.I. de Pommenauque
50500 Carentan
France
T +33 (0)2 33 42 09 52
info@laudescher.com
www.laudescher.com

SCALE

LAUDER LINEA 3D


INTERIOR

TECHNICAL SPECIFICATIONS

| | |
|--------------------------|---|
| Panel dimensions | 1880 x 600 mm (bespoke size available) |
| Cross-section of slats | 40 mm (front) x 32 mm (height) |
| Spacing between slats | 35 mm |
| Slats center to center | 75 mm |
| Black rear counter slats | 34 x 45 mm |
| Overall thickness | 67 mm |
| Wood species | Pine |
| Surface mass (pine) | 15,1 kg/m ² (wall), 15,3 kg/m ² (ceiling) |
| Opening percentage | 47% |

EDGE SYSTEM

Wall



Edge: A

Mechanical fixing
using screws
(according to DTU 36-2)

Suspended ceiling




Edge: D/C

Grid system installation
(according to DTU 58-1)

FINISH/REACTION TO FIRE (ACCORDING TO EN 13501-1)

| | |
|---------------|-------------------|
| Natural | D-s1,d0 / B-s1,d0 |
| Clear lacquer | D-s1,d0 / B-s1,d0 |
| Wax Color | D-s1,d0 / B-s1,d0 |
| Wax Color MC | D-s1,d0 / B-s1,d0 |

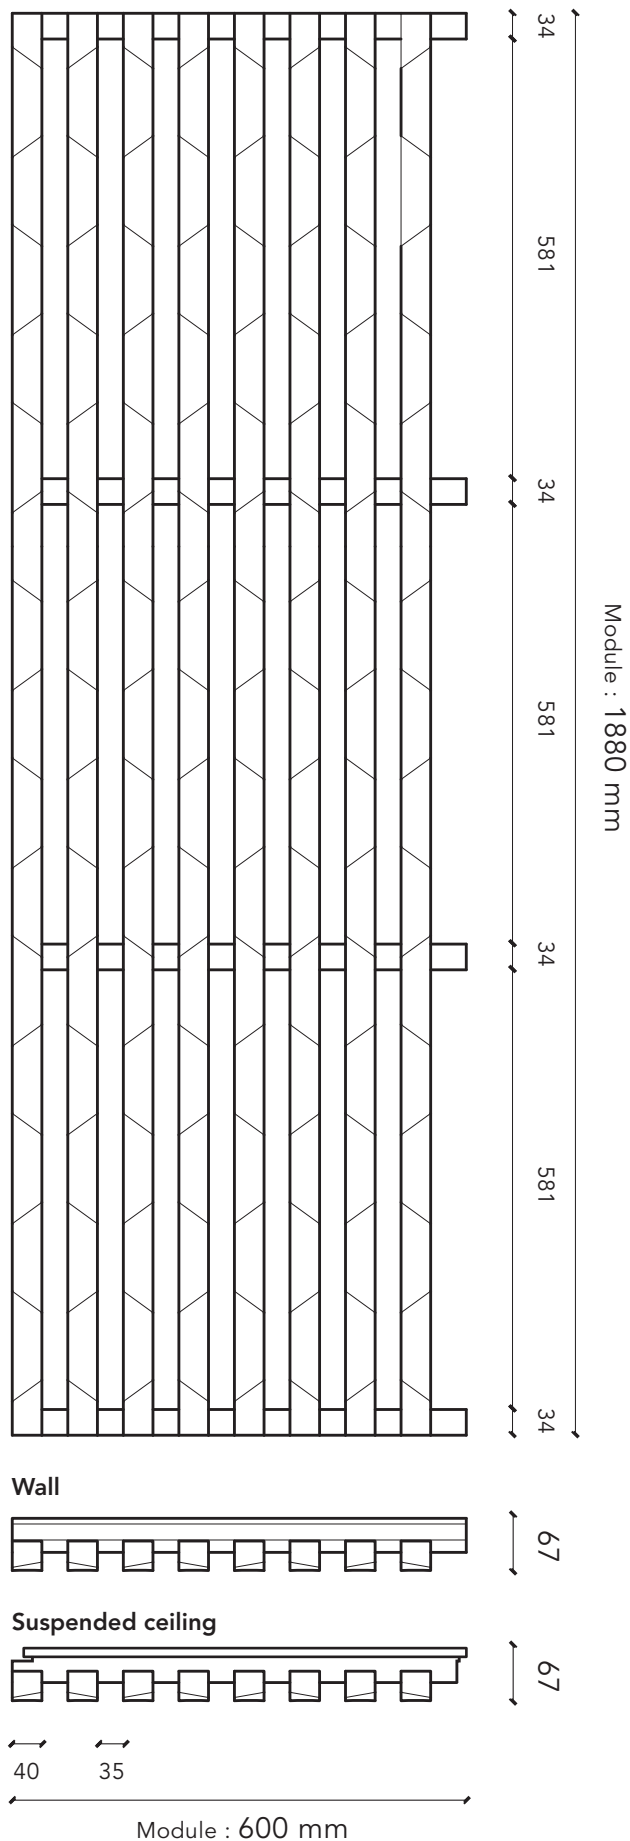

SCALE

LAUDER LINEA 3D

INTERIOR

Sound absorption was measured according to ISO 354.


The various data elements relating to sound absorption have been calculated in accordance with ISO 11654 (Lauder LINEA + rigid mineral wool tiles).

ACOUSTIC RESULTS

SCALE WALL + 20 MM MW ON PLENUM E50 MM

AVERAGE COEFFICIENT OF SOUND ABSORPTION

α_p

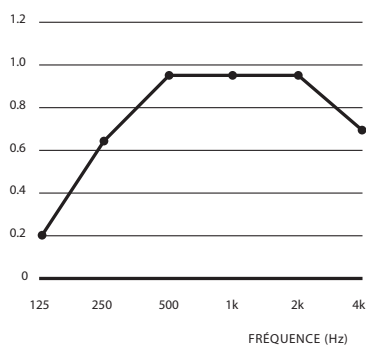

| F (Hz) | α_p |
|--------|------------|
| 125 | 0.20 |
| 250 | 0.65 |
| 500 | 0.95 |
| 1,000 | 0.95 |
| 2,000 | 0.95 |
| 4,000 | 0.70 |

WEIGHTED INDEX:

$\alpha_w = 0.85$

ABSORPTION CATEGORY:

Classe B


ACCORDING TO ASTM C423:

NRC = 0.9

SCALE CEILING + 20 MM MW ON PLENUM E50 MM

AVERAGE COEFFICIENT OF SOUND ABSORPTION

α_p

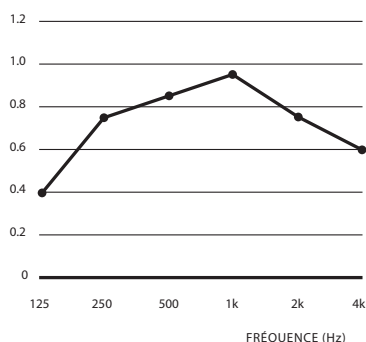

| F (Hz) | α_p |
|--------|------------|
| 125 | 0.40 |
| 250 | 0.75 |
| 500 | 0.85 |
| 1,000 | 0.95 |
| 2,000 | 0.75 |
| 4,000 | 0.60 |

WEIGHTED INDEX:

$\alpha_w = 0.75$

ABSORPTION CATEGORY:

Classe C

ACCORDING TO ASTM C423:

NRC = 0.85



ACOUSTIC PRODUCTS LIMITED

70C High Street

Whitstable

Kent

CT5 1BB

TEL: 01227 281140

FAX: 01227 281141

enquiries@acoustic-products.co.uk

www.acoustic-products.co.uk